

> Clima-Pave Mellifont

Technical Data Sheet

Traditional Distressed Edge Block Paving



nssPlus

Q24 115

Q24 117

Q24 119




Features

- Antiqued finish gives the look of time-worn cobble
- 3 Size mix
- Available in a range of colours

Product Range

	Dimensions (mm)	Colours	Pcs per m ²	m ² per bale	Pcs per Bale	No. Layers	Approx. Bale Weight (KG)	Profile
Clima - Mellifont (Antiqued)	(3 size mix only) 120 x 160 x 60 160 x 160 x 60 240 x 160 x 60	Natural, Curragh Gold, Rustic, Charcoal, Brindle, Red	35	9.6	350	10	1205	Antiqued Square Edge
Clima - Mellifont (Antiqued)	(3 size mix only) 120 x 160 x 80 160 x 160 x 80 240 x 160 x 80	Natural, Curragh Gold, Rustic, Charcoal, Brindle, Red	35	6.72	245	7	1190	Antiqued Square Edge
Clima - Mellifont (Antiqued)	240 x 160 x 80	Natural, Curragh Gold, Rustic, Charcoal, Brindle, Red	27	6.93	180	9	1170	Antiqued Square Edge

Bold Text = in stock - Light Text = made to order (minimum order quantity applies)

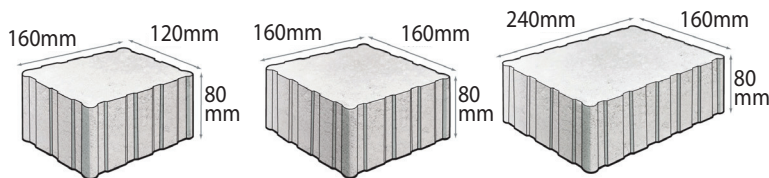

> Get In Touch:

T: +353 1 802 6300 technical@kilsaran.ie www.kilsaran.ie

T: +44 (0) 161 872 8899 www.kilsaraninternational.co.uk



Technical & Performance Data

Sizes	Single Size: 240x160x80mm 3 Size Mix: 240x160x80mm, 160x160x80mm, 120x160x80mm The 3 size mix also comes in a 60mm depth	Slip/Skid Resistance	Low potential - Typical USRV 60
Manufacturing Standard	BS EN 1338:2003	Finish	Mechanically distressed edges to provide an aged look
Manufacturing Method	Hydraulically pressed semi-dry concrete	Applications	Domestic, Civic and Commercial
Constituents	Aggregates, cement, admixture and colour pigment		
Strength	Typical Tensile Splitting Strength of ≥ 3.6 MPa and a failure load of ≥ 250 N/mm		
Permeability	1800 litres/second/hectare		

Sustainability

Kilsaran is committed to leading the way in the industry with sustainable and environmentally friendly products, manufacturing processes and continual product development.

All of our products are manufactured using industry leading best in class manufacturing facilities, reducing the impact our products have on the environment, as showcased with our newly awarded ISO 50001 certificate

Throughout our paving products we endeavour to replace 50% of the ordinary Portland cement with a high quality carbon neutral cement replacement Ground-granulated blast-furnace slag (GGBS), use 100% recycled water and locally sourced quality materials.

Making Kilsaran's extensive paving range, one of the most environmental friendly on the market.

Maintenance and Cleaning

Kilsaran recommends regularly cleaning on an annual basis is performed, for more information please contact our technical team or download our Maintenance and Cleaning document from our website.



TECHNICAL SUPPORT

Help with the preparation of specifications using any of Kilsaran's hard landscaping products, including design, BIM and NBS is available through our dedicated technical team and regional sales office.

For further information, please contact Kilsaran's Technical Team: technical@kilsaran.ie

KILSARAN INTERNATIONAL
Piercetown
Dunboyne
Co. Meath
Ireland
A86 W820

T: 01 802 6300
E: info@kilsaran.ie
kilsaran.ie

KILSARAN INTERNATIONAL
Suite 30
1-3 The Courtyard
Calvin Street
Bolton
BL1 8PB

T: 0161 872 8899
E: info@kilsaraninternational.co.uk
kilsaraninternational.co.uk

