

> Clima-Pave Newgrange

Technical Data Sheet

Lightly Textured Granite Aggregate
Concrete Block Paving



Part of the
Eco Paving Range

nssPlus

Q24 115

Q24 117

Q24 119


Features

- Textured granite-effect finish
- Available in a range of colours
- 3 size mix
- Part of the eco paving range

Product Range

| | Dimensions (mm) | Colours | Pcs per m ² | m ² per bale | Pcs per Bale | No. Layers | Approx. Bale Weight (KG) | Profile |
|------------------------------------|---|--|------------------------|-------------------------|--------------|------------|--------------------------|-------------|
| Clima - Newgrange 60mm (Shotblast) | 200 x 100 x 60 | Silver Granite , Black Granite, Buff Granite | 50 | 9.6 | 480 | 10 | 1060 | Chamfer |
| Clima - Newgrange (Shotblast) | (3 size mix only) 120 x 160 x 60 160 x 160 x 60 240 x 160 x 60 | Silver Granite , Black Granite, Buff Granite | 35 | 9.6 | 350 | 10 | 1205 | Square Edge |
| Clima - Newgrange (Shotblast) | (3 size mix only) 120 x 160 x 80 160 x 160 x 80 240 x 160 x 80 | Silver Granite , Black Granite, Buff Granite | 35 | 6.72 | 245 | 7 | 1190 | Square Edge |
| Clima - Newgrange (Shotblast) | 240 x 160 x 80 | Silver Granite , Black Granite, Buff Granite | 27 | 6.72 | 175 | 7 | 1075 | Square Edge |
| Clima - Newgrange 80mm (Shotblast) | 200 x 100 x 80 | Silver Granite , Black Granite, Buff Granite | 50 | 6.72 | 336 | 7 | 1115 | Chamfer |

Bold Text = in stock - Light Text = made to order (minimum order quantity applies)

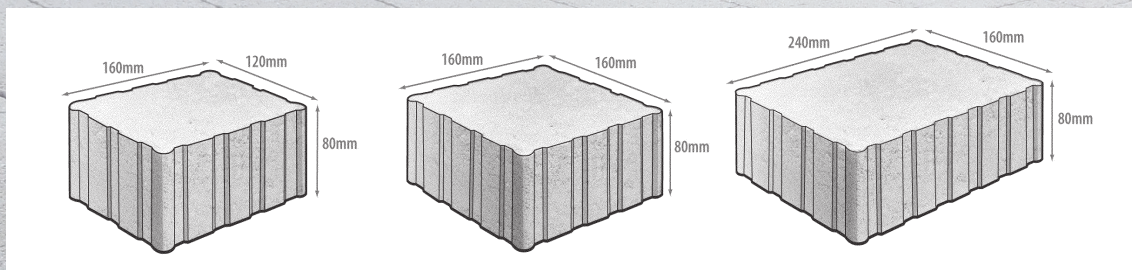

> Get In Touch:

T: +353 1 802 6300 technical@kilsaran.ie www.kilsaran.ie

T: +44 (0) 161 872 8899 www.kilsaraninternational.co.uk



Technical & Performance Data

| | | | |
|-------------------------------|---|-----------------------------|---------------------------------|
| Sizes | Single Size: 240x160x80mm 3 Size Mix: 240x160x80mm, 160x160x80mm, 120x160x80mm The 3 size mix also comes in a 60mm depth | Slip/Skid Resistance | Low potential - Typical USRV 60 |
| Manufacturing Standard | BS EN 1338:2003 | Finish | Textured |
| Manufacturing Method | Hydraulically pressed semi-dry concrete | Applications | Domestic, Civic and Commercial |
| Constituents | Aggregates, cement, admixture and colour pigment | | |
| Strength | Typical Tensile Splitting Strength of ≥ 3.6 MPa and a failure load of ≥ 250 N/mm | | |
| Permeability | 1800 litres/second/hectare | | |

Eco Paving Range

Kilsaran is committed to leading the way in the industry with sustainable and environmentally friendly product manufacturing and continual product development.

All of our products are manufactured in our industry leading best in class manufacturing facilities to reduce the impact of our product range on our environment. All products are manufactured using 100% recycled water and using locally sourced quality materials.

Within our Eco Paving range we have developed and engineered a number of products with further reduced impact on the environment. The Eco Paving range is manufactured with a minimum of 25% non-primary aggregates, up to 10% pre consumer aggregate replacement and 50% of the ordinary Portland cement replaced with a carbon neutral high quality cement replacement.

Maintenance and Cleaning

Kilsaran recommends regularly cleaning on an annual basis is performed, for more information please contact our technical team or download our Maintenance and Cleaning document from our website.



TECHNICAL SUPPORT

Help with the preparation of specifications using any of Kilsaran's hard landscaping products, including design, BIM and NBS is available through our dedicated technical team and regional sales office.

For further information, please contact Kilsaran's Technical Team:
technical@kilsaran.ie

KILSARAN INTERNATIONAL

Piercetown
Dunboyne
Co. Meath
Ireland
A86 W820

T: 01 802 6300
E: info@kilsaran.ie
kilsaran.ie

KILSARAN INTERNATIONAL

Suite 30
1-3 The Courtyard
Calvin Street
Bolton
BL1 8PB

T: 0161 872 8899
E: info@kilsaraninternational.co.uk
kilsaraninternational.co.uk

