

## Belvedere Flags

## Technical Data Sheet

### Features

- Concrete Flag Paving
- Available in 6 colours
- Irregular edge profile
- Riven surface finish
- Supplied in 60mm depth only
- Suitable for use on patios, paths and commercial pedestrian areas
- A mixed pack of 4 sizes
- Laid in a random bond pattern



Silver Granite



Black Granite



Stone




Rustic



Buff



Curragh Gold

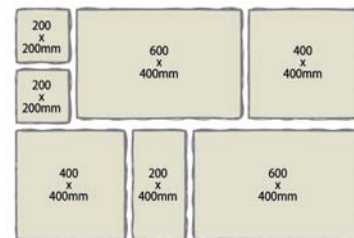

Unit sizes and quantities, as supplied.

### Product Range

Range	Dimensions (mm) (4 size mix only)	Colours	Pcs per m <sup>2</sup>	m <sup>2</sup> per pack	Pcs per pack	No. of layers per pack	Pack Weight (Kg)
Belvedere Curled	4 Co-ordinating Mixed Sizes	Silver Granite, Black Granite, Stone	N/A	9.6	70	10	1270
<b>Belvedere</b>	as shown above	<b>Rustic, Buff, Curragh Gold</b>	<b>N/A</b>	<b>9.6</b>	<b>70</b>	<b>10</b>	<b>1270</b>

**Bold text = in stock**    Light text = Made to order (Minimum order quantity applies).

### Technical & Performance Data

Product Type	Concrete flag paving
Product Standard	BS EN 1339:2003
Manufacturing Method	Hydraulically pressed semi-dry concrete
Finish	Riven
Packaging Information	Baled, strapped and plastic cover
Slip/Skid Resistance	Low potential
Strength	Typically class 3 compliant to BS EN 1339:2003
Complimentary Products	Kerb setts, Kerb blocks, Tara kerb, Mellifont kerb

Permeable option	Yes, see Clima-Pave section
Application & Trafficking	* Product suitable for pedestrian areas and commercial footpaths, light car only over-run can be accommodated in conjunction with the correct site specific sub base design. Not suitable for driveway use. For further information on design and loading please see installation standards section on pages 96-98.
Chamfer	Rounded irregular chamfer of approximately 4-6mm.
Joint	Belvedere Paving has a 4-6mm approx. integral spacer nib which will give a resulting standard joint width of approx. 6-8mm when laid. Joints should be filled with Kiln dried jointing sand or a proprietary wide jointing compound approved for this product. – see page 99 for further details on jointing.
BREEAM	'A' rated in accordance with the Green Guide Specification Edition 4, 2009. 'A+' rated when used in conjunction with a prepared recycled sub base.
Certification	ISO 9001:2008 ISO 14001

### Get in Touch:

T: +353 1 802 6300 - E: [technical@kilsaran.ie](mailto:technical@kilsaran.ie) - W: [www.kilsaran.ie](http://www.kilsaran.ie)

T: +44 (0)161 872 8899 - E: [technical@kilsaraninternational.co.uk](mailto:technical@kilsaraninternational.co.uk) - W: [www.kilsaraninternational.co.uk](http://www.kilsaraninternational.co.uk)

