

## Concrete Tactile Paving Units



**nssPlus**

Q25 320

## Features

Blister tactile paving provides a profiled finish comprising of rows of flat top domes on the surface. The blister surface provides a warning to visually impaired people in the absence of a kerb up-stand at controlled and uncontrolled crossings


## Product Range

Dimensions (mm)	Colours	Pcs per m2	m2 per pack	Pcs per pack	No. of layers per pack	Pack Weight (Kg)
400 x 400 x 50	Buff, Red	6.25	11.52	72	12	1215


**Bold Text = in stock** - Light Text = made to order (minimum order quantity applies)



Buff

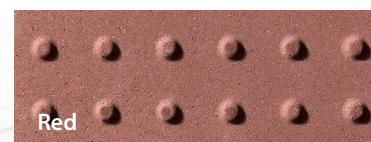

Red

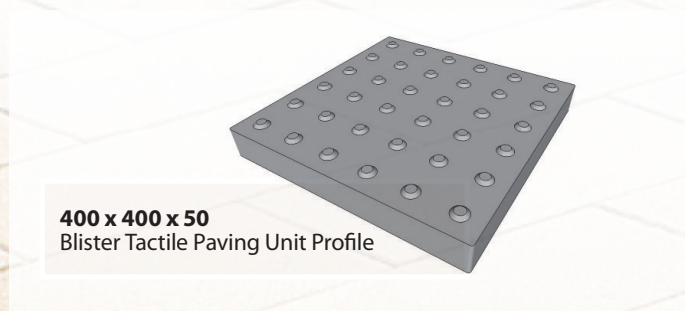

**400 x 400 x 50**  
Blister Tactile Paving Unit Profile

## Technical & Performance Data

<b>Product Type</b>	Concrete Block Paving
<b>Product Standard</b>	BS EN 1339:2003, BS7997 BS:2003, DDCEN-TS15209:2008
<b>Manufacturing Method</b>	Hydraulically pressed semi-dry concrete
<b>Finish</b>	Blister pattern. Available in alternative textures and colours upon request.
<b>Packaging Information</b>	Baled, strapped and plastic cover
<b>Slip/Skid Resistance</b>	Low potential
<b>Strength</b>	Typically class 1 compliant to BS EN 1339:2003
<b>Complimentary Products</b>	Kerb setts, Kerb blocks, Tara kerb, Mellifont kerb

<b>Application &amp; Trafficking</b>	Product suitable for pedestrianized areas
<b>Chamfer</b>	No
<b>Joint</b>	Blister Tactile Paving has a narrow finished joint of 1mm approx. This product has no integral spacer nib and no chamfer. Great care and attention must be paid when handling and installing to avoid chipping and damage to edges. Joints should be filled with kiln dried jointing sand or if laid on a motor bedding then a mortar joint should be used - see page 112 for further details on jointing
<b>BREEAM</b>	"A" rated in accordance with the Green Guide Specification Edition 4, 2009 "A+" rated when used in conjunction with a prepared recycled sub-base
<b>Certification</b>	ISO 14001, ISO 9001, ISO 17025, ISO 50001

## Sustainability

Kilsaran is committed to leading the way in the industry with sustainable and environmentally friendly products, manufacturing processes and continual product development.

**All of our products are manufactured using industry leading best in class manufacturing facilities, reducing the impact our products have on the environment, as showcased with our newly awarded ISO 50001 certificate**

Throughout our paving products we endeavour to replace 50% of the ordinary Portland cement with a high quality carbon neutral cement replacement Ground-granulated blast-furnace slag (GGBS), use 100% recycled water and locally sourced quality materials.

Making Kilsaran's extensive paving range, one of the most environmental friendly on the market.

## Maintenance and Cleaning

Kilsaran recommends regularly cleaning on an annual basis is performed, for more information please contact our technical team or download our Maintenance and Cleaning document from our website.



## TECHNICAL SUPPORT

Help with the preparation of specifications using any of Kilsaran's hard landscaping products, including design, BIM and NBS is available through our dedicated technical team and regional sales office.

**For further information, please contact Kilsaran's Technical Team:**  
**technical@kilsaran.ie**

**KILSARAN INTERNATIONAL**  
Piercetown  
Dunboyne  
Co. Meath  
Ireland  
A86 W820

**T: 01 802 6300**  
**E: info@kilsaran.ie**  
**kilsaran.ie**

**KILSARAN INTERNATIONAL**  
Suite 30  
1-3 The Courtyard  
Calvin Street  
Bolton  
BL1 8PB

**T: 0161 872 8899**  
**E: info@kilsaraninternational.co.uk**  
**kilsaraninternational.co.uk**

