

Hazard Warning concrete tactile paving



nbsPlus

Q25 320

Features

Corduroy Hazard Warning tactile flags are used to denote a hazard Examples of typical use applications are:

- the top and bottom of a flight of steps
- level crossings


The flat top rods are laid parallel to the edge of the hazard at a distance of 400mm away

Product Range


Dimensions (mm)	Colours	Pcs per m2	m2 per pack	Pcs per pack	No. of layers per pack	Pack Weight (Kg)
400 x 400 x 50	Red, Buff	6.25	11.25	72	12	1215

Bold Text = in stock - Light Text = made to order (minimum order quantity applies)

400 x 400 x 50
Corduroy Tactile Paving Unit Profile

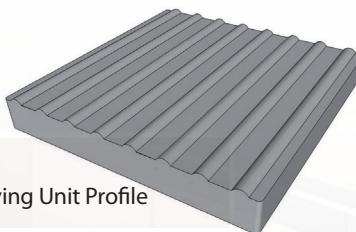

Buff

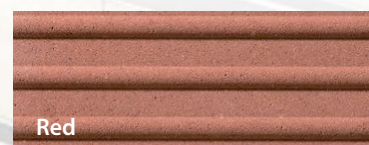

Red

Technical & Performance Data

Product Type	Concrete Flag Paving
Product Standard	BS EN 1339:2003, BS7997 BS:2003, DDCEN-TS15209:2008
Manufacturing Method	Hydraulically pressed semi-dry concrete
Finish	Corduroy pattern. Available in alternative textures and colours upon request.
Packaging Information	Baled, strapped and plastic cover
Slip/Skid Resistance	Low potential
Strength	Typically class 1 compliant to BS EN 1339:2003
Complimentary Products	Kerb setts, Kerb blocks, Tara kerb, Mellifont kerb

Application & Trafficking	Product suitable for pedestrianized areas
Chamfer	No
Joint	Corduroy Tactile Paving has a narrow finished joint of 1mm approx. This product has no integral spacer nib and no chamfer. Great care and attention must be paid when handling and installing to avoid chipping and damage to edges. Joints should be filled with kiln dried jointing sand or if laid on a motor bedding then a mortar joint should be used - see page 112 for further details on jointing.
BREEAM	"A" rated in accordance with the Green Guide Specification Edition 4, 2009 "A+" rated when used in conjunction with a prepared recycled sub-base
Certification	ISO 14001, ISO 9001, ISO 17025, ISO 50001

Sustainability

Kilsaran is committed to leading the way in the industry with sustainable and environmentally friendly products, manufacturing processes and continual product development.

All of our products are manufactured using industry leading best in class manufacturing facilities, reducing the impact our products have on the environment, as showcased with our newly awarded ISO 50001 certificate

Throughout our paving products we endeavour to replace 50% of the ordinary Portland cement with a high quality carbon neutral cement replacement Ground-granulated blast-furnace slag (GGBS), use 100% recycled water and locally sourced quality materials.

Making Kilsaran's extensive paving range, one of the most environmental friendly on the market.

Maintenance and Cleaning

Kilsaran recommends regularly cleaning on an annual basis is performed, for more information please contact our technical team or download our Maintenance and Cleaning document from our website.



TECHNICAL SUPPORT

Help with the preparation of specifications using any of Kilsaran's hard landscaping products, including design, BIM and NBS is available through our dedicated technical team and regional sales office.

For further information, please contact Kilsaran's Technical Team:
technical@kilsaran.ie

KILSARAN INTERNATIONAL
Piercetown
Dunboyne
Co. Meath
Ireland
A86 W820

T: 01 802 6300
E: info@kilsaran.ie
kilsaran.ie

KILSARAN INTERNATIONAL
Suite 30
1-3 The Courtyard
Calvin Street
Bolton
BL1 8PB

T: 0161 872 8899
E: info@kilsaraninternational.co.uk
kilsaraninternational.co.uk

