

Quick Fix Macadam

Description

Kilsaran Quick Fix Macadam is a ready-to-use reinstatement asphalt that will perform similarly to hot laid macadam.

Interlocking High Polished Stone Value (PSV) aggregates are used, along with specially modified bitumen to create an easy to use material for a range of applications.

Applications

Quick Fix Macadam is used to repair potholes, utility cuts, driveways, local patches and small road repairs.

Product Use

Kilsaran Quick Fix Macadam can be used from 10mm to 100mm depth and can be trafficked instantly in hot and cold conditions.


Step 1- Ensure the area to be filled is clean and the foundation is well compacted.

Step 2-Loosen the material in the bag by slightly tamping against the ground, and place in 30mm compacted layers.

Step 3- Compact the material using a hand tamper or vibratory plate compactor until the finished level is achieved, repeating step 2 where necessary.

Technical Data

Parameter	Performance	Test Method	Characteristics
Binder Content	Bmin 4.4%	EN 12697-1	Durability Binder Adhesion Skid resistance
Void Content	Vmin 3.0% Vmax NR	EN 12697-8	Stiffness Resistance to deformation Resistance to abrasion
Max. temperature of the mix (°C)	100	EN 12697-13	Stiffness Resistance to fatigue

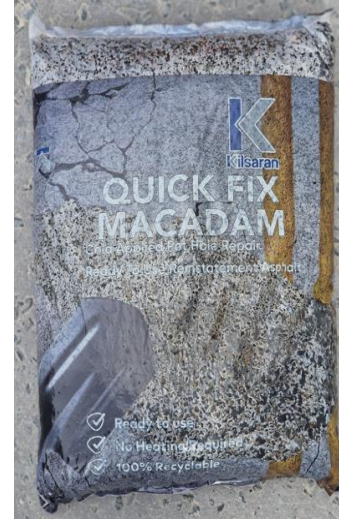

Benefits

- No heating required
- Ready to use
- Durable
- No mixing required
- Quick installation, and ready for traffic immediately
- 100% recyclable

Packaging

- 25kg bags

Consumption

- Approximately 0.5m² at 25mm compacted depth

Health & Safety

Please refer to the latest material Safety Data Sheet online at www.kilsaran.ie
Wear appropriate PPE

Get in touch



ROI T: +353 (0)1 802 6300 E: technicaladmin@kilsaran.ie kilsaran.ie

UK T: +44 (0)161 872 8899 E: info@kilsaraninternational.co.uk kilsaraninternational.co.uk