

## Clima-Pave Killeen

### Features


- Sharp edge
- 4 co-ordinating sizes
- Part of our Eco Range Technical & Performance Data Larger spacer unit
- Granite-effect finish available
- 70mm depth



### Product Range

| Range                     | Dimensions (mm)                      | Colours                              | Pcs Per m2 | m2 Per bale | Pcs Per bale | No. Layers | Approx. Bale Weight (KG) | Profile     |
|---------------------------|--------------------------------------|--------------------------------------|------------|-------------|--------------|------------|--------------------------|-------------|
| Killeen (Standard Smooth) | 4 Co-Ordinating Mixed Sizes as shown | Silver Granite, Black Granite, Slate | N/A        | 7.56        | 72           | 9          | 1180                     | Square Edge |
| Killeen (Antiqued)        |                                      | Silver Granite, Black Granite, Slate | N/A        | 7.56        | 72           | 9          | 1180                     | Square Edge |
| Killeen (Ground)          |                                      | Silver Granite, Black Granite, Slate | N/A        | 7.56        | 72           | 9          | 1180                     | Square Edge |

Bold Text = in stock – Light Text = made to order (minimum order quantity applies)

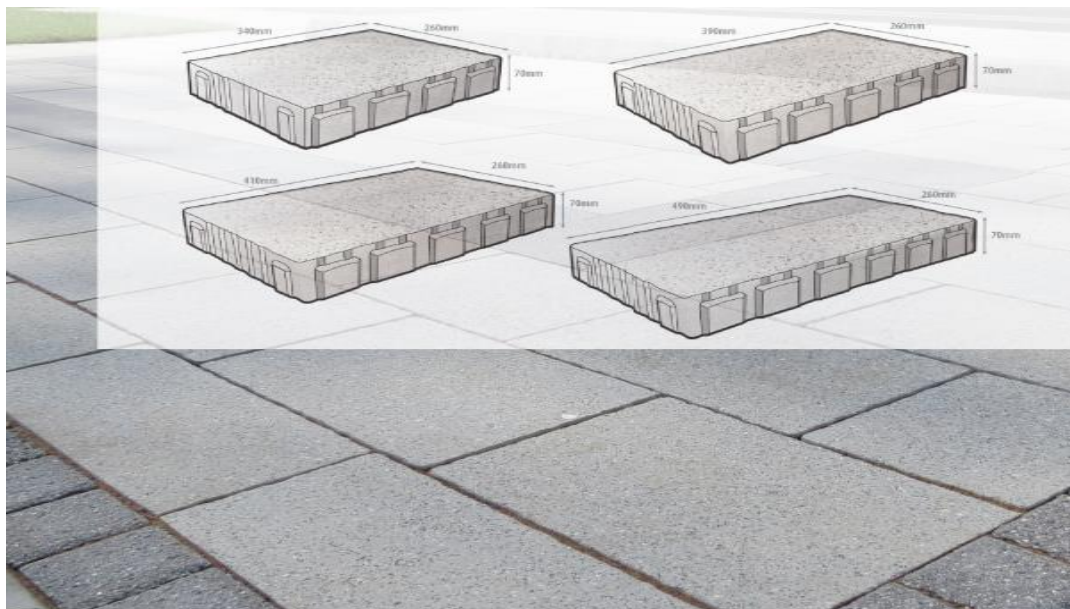

|                              |   |                                      |  |
|------------------------------|---|--------------------------------------|--|
| <b>Product Type</b>          | Concrete Flag                           | <b>Application &amp; Trafficking</b> | Domestic, Civic and Commercial                   |
| <b>Product Standard</b>      | BS EN 1339:2003                         | <b>Constituents</b>                  | Aggregates, cement, admixture and colour pigment |
| <b>Manufacturing Method</b>  | Hydraulically pressed semi dry concrete | <b>Permeability</b>                  | 1800 litres/second/hectare                       |
| <b>Finish</b>                | Ground or Antiqued finish               |                                      |  |
| <b>Packaging Information</b> | Baled, strapped and plastic cover       |                                      |  |
| <b>Slip/Skid Resistance</b>  | Low potential - Typical USRV 60         |                                      |  |
| <b>Strength</b>              | Compliant to EN 1339:2003               |                                      |  |

### Technical Support

Help with the preparation of specifications using any of Kilsaran's hard landscaping products, including design, BIM and NBS is available through our dedicated technical team and regional sales office.

For further information, please contact Kilsaran's **Technical Team:** [technical@kilsaran.ie](mailto:technical@kilsaran.ie)

**Eco Paving Range** Kilsaran are committed to leading the way in the industry with sustainable and environmentally friendly product manufacturing and continual product development.

### Get in touch



**ROI** T: +353 (0)1 802 6300 E: [technicaladmin@kilsaran.ie](mailto:technicaladmin@kilsaran.ie) [kilsaran.ie](http://kilsaran.ie)

**UK** T: +44 (0)161 872 8899 E: [info@kilsaraninternational.co.uk](mailto:info@kilsaraninternational.co.uk) [kilsaraninternational.co.uk](http://kilsaraninternational.co.uk)