

## Clima-Pave Slane



### Features

- Unique spacer design maximises drainage whilst maintaining a smaller finished joint, i.e. the paved area is safer for heels etc. and easier to maintain
- Traditional 200 x 100 size unit
- Suitable for laying in stretcher course and herringbone pattern for heavier use
- Machine lay option available
- Face-mix product to create an enhanced surface finish and better durability

### Product Range

Range	Dimensions (mm)	Colours	Pcs Per m2	m2 Per bale	Pcs Per bale	No. Layers	Approx. Bale Weight (KG)	Profile
Clima – Slane 60mm (Standard)	200 x 100 x 60	Natural, Charcoal, Rustic, Curragh Gold, Brindle, Red	50	9.6	480	10	1260	Chamfer
Clima – Slane 80mm (Standard)	200 x 100 x 80	Natural, Charcoal, Rustic, Curragh Gold, Brindle, Red	50	7.2	360	9	1195	Chamfer

Bold Text = in stock – Light Text = made to order (minimum order quantity applies)

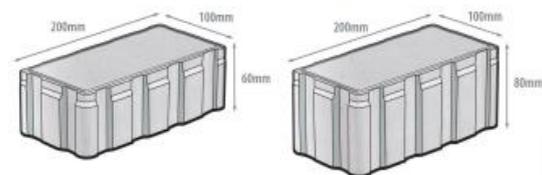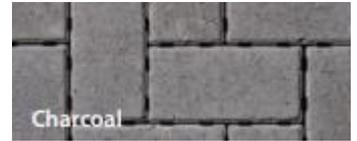

<b>Product Type</b>	Concrete Paver
<b>Product Standard</b>	BS EN 1338:2003
<b>Manufacturing Method</b>	Hydraulically pressed semi dry concrete
<b>Finish</b>	Standard
<b>Packaging Information</b>	Baled, strapped and plastic cover
<b>Slip/Skid Resistance</b>	Low potential - Typical USRV 60
<b>Strength</b>	Typical Tensile Splitting Strength of $\geq 3.6$ MPa and a failure load of $\geq 250$ N/mm

<b>Application &amp; Trafficking</b>	Domestic, Civic, Commercial and Heavy Industrial
<b>Constituents</b>	Aggregates, cement, admixture and colour pigment
<b>Permeability</b>	1800 litres/second/hectare

### Technical Support

Help with the preparation of specifications using any of Kilsaran's hard landscaping products, including design, BIM and NBS is available through our dedicated technical team and regional sales office.

For further information, please contact Kilsaran's **Technical Team:** [technical@kilsaran.ie](mailto:technical@kilsaran.ie)

**Eco Paving Range** Kilsaran are committed to leading the way in the industry with sustainable and environmentally friendly product manufacturing and continual product development.

### Get in touch



**ROI** T: +353 (0)1 802 6300 E: [technicaladmin@kilsaran.ie](mailto:technicaladmin@kilsaran.ie) [kilsaran.ie](http://kilsaran.ie)

**UK** T: +44 (0)161 872 8899 E: [info@kilsaraninternational.co.uk](mailto:info@kilsaraninternational.co.uk) [kilsaraninternational.co.uk](http://kilsaraninternational.co.uk)