

Kerb Block

Features


- Standard Kerb block unit with bullnose profile
- External corners are available for high rise installation
- Suitable for domestic and commercial schemes

Product Range

Range	Dimensions (mm)	Colours	Pcs Per LM	Linear Metres Per bale	Pcs Per bale	Pcs per Layer	Approx. Bale Weight (KG)
Kerb Block	200 x 127 x 100	Charcoal	10	24	240	8	1225



Charcoal

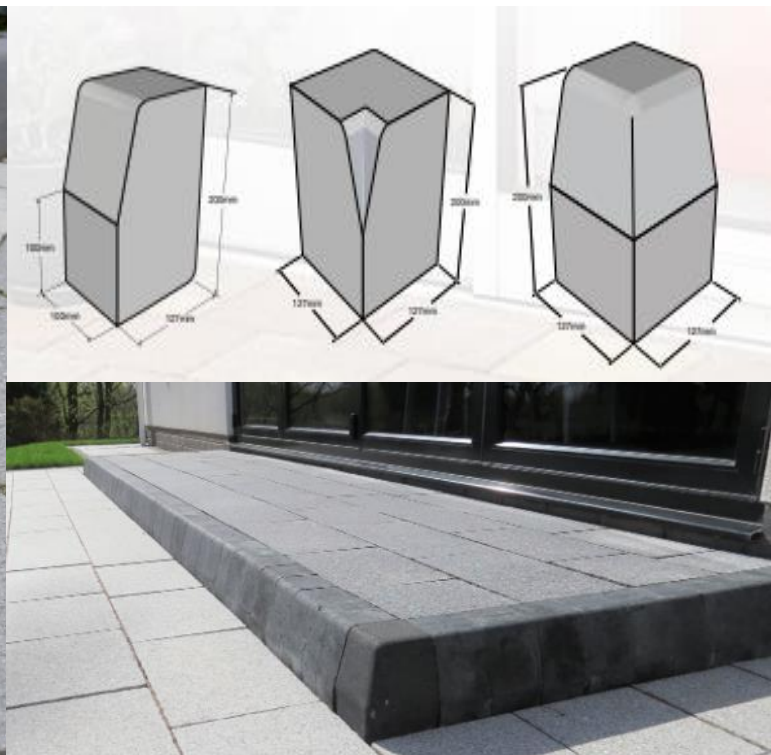

Product Type	Precast concrete kerb
Product Standard	BS EN 1340:2003
Manufacturing Method	Hydraulically pressed semi dry concrete
Finish	Standard smooth, Squared edge
Packaging Information	Baled, strapped and plastic cover
Strength	Typically Class 1 compliant to EN1340
Application	Residential and Commercial

Slip/Skid Resistance	Low potential - Typical USRV 60
Chamfer	None
Certifications	ISO 14001, ISO 9001, ISO 17025, ISO 50001
BREEAM	A rated in accordance with the Green Guide Specification A+ rated when used in conjunction with a prepared recycled sub-base

Technical Support

Help with the preparation of specifications using any of Kilsaran's hard landscaping products, including design, BIM and NBS is available through our dedicated technical team and regional sales office.

For further information, please contact Kilsaran's **Technical Team:** technical@kilsaran.ie

Eco Paving Range Kilsaran are committed to leading the way in the industry with sustainable and environmentally friendly product manufacturing and continual product development.

Get in touch



ROI T: +353 (0)1 802 6300 E: technicaladmin@kilsaran.ie kilsaran.ie

UK T: +44 (0)161 872 8899 E: info@kilsaraninternational.co.uk kilsaraninternational.co.uk