

6 Size Setts Block Paving

Setts are an ideal product to lift the aesthetics of your project and play a big part in our designer's product portfolio. The inclusion of a feature border to any hard landscaping area is the attention to detail that our designers look for, to give that WOW factor and make your project stand out from the crowd for all the right reasons.

There are 3 styles of Setts to complement our existing range of block paving as well as blending harmoniously with our flag paving range.

Features

- Concrete Block Paving
- Available with either a contemporary edge (Standard), a rustic tumbled edge to give the effect of a time worn cobble (Aged) or a Black Granite textured range
- Six size coordinating mix block paving units
- No spacer nibs providing a narrow jointing space
- Available in both a 60mm and 80mm depth

Product Range

Dimensions (mm)	Colours	Pcs Per m2	m2 Per bale	Pcs Per bale	Pcs per Layer	Approx. Bale Weight (KG)	Profile
60mm (Standard)	Rustic, Curragh Gold, Charcoal, Natural	108	9.24	1140	108	1060	Square Edge
80mm (Standard)	Rustic, Curragh Gold, Charcoal	108	6.72	864	108	1150	Square Edge
60mm (Aged)	Rustic, Curragh Gold, Charcoal, Natural	108	9.24	1140	108	1060	Square Edge
80mm (Aged)	Rustic, Curragh Gold, Charcoal	108	6.72	864	108	1150	Square Edge
60mm (Textured)	Black Granite	108	9.24	1140	108	1060	Square Edge
80mm (Textured)	Black Granite	108	6.72	864	108	1150	Square Edge

Colour Chart

Rustic




Curragh Gold



Charcoal



Natural

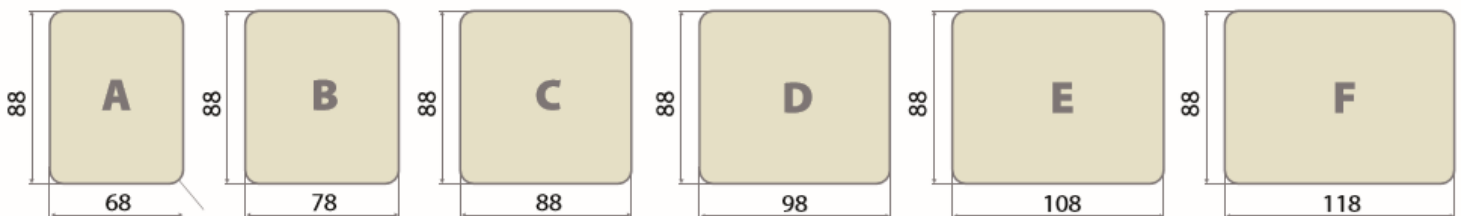

Get in touch



ROI T: +353 (0)1 802 6300 E: technicaladmin@kilsaran.ie kilsaran.ie

UK T: +44 (0)161 872 8899 E: info@kilsaraninternational.co.uk kilsaraninternational.co.uk

Product Type	Concrete Block Paving
Product Standard	EN 1338:2003
Manufacturing Method	Hydraulically pressed semi dry concrete
Finish	Standard smooth finish
Packaging Information	Baled, strapped and plastic cover
Slip/Skid Resistance	Low potential – Typically USRV 60 for Standard Smooth
Strength	Typical tensile splitting strength of >3.6 MPa and a failure load of >250N/mm

Application & Trafficking	Installation to BS 7533-2:2001. Please refer to the relevant part of BS 7533 for the correct sub-base design and the most suitable product size for your application. Available from www.bsigroup.com Product suitable for both pedestrian and light car traffic areas only
Joint	Sett Paving has a narrow-finished joint of 1mm approx. This product has no integral spacer nib and no chamfer and is suited to lower maintenance areas. Great care and attention must be paid when handling and installing to avoid chipping and damage to edges. Joints should be filled with Kiln dried jointing sand
BREEAM	A rated in accordance with Green Guide Specification Edition 4, 2009. A+ rated when used in conjunction with a prepared recycled sub-base

Eco Paving Range Kilsaran is committed to leading the way in the industry with sustainable and environmentally friendly product manufacturing and continual product development.

All of our products are manufactured in our industry leading best in class manufacturing facilities to reduce the impact of our product range on our environment. All products are manufactured using 100% recycled water and using locally sourced quality materials.

Within our Eco Paving range, we have developed and engineered a number of products with further reduced impact on the environment. The Eco Paving range is manufactured with a minimum of 25% non-primary aggregates, up to 10% pre consumer aggregate replacement and 50% of the ordinary Portland cement replaced with a carbon neutral high-quality cement replacement.

Maintenance and Cleaning

Kilsaran recommends regularly cleaning on an annual basis is performed, for more information please contact our technical team or download our Maintenance and Cleaning document from our website.

TECHNICAL SUPPORT

Help with the preparation of specifications using any of Kilsaran's hard landscaping products, including design, BIM and NBS is available through our dedicated technical team and regional sales office.

For further information, please contact
Kilsaran's Technical Team:
technical@kilsaran.ie



Get in touch



ROI T: +353 (0)1 802 6300 E: technicaladmin@kilsaran.ie kilsaran.ie

UK T: +44 (0)161 872 8899 E: info@kilsaraninternational.co.uk kilsaraninternational.co.uk