

Lismore Block Paving

Features


- Concrete Block Paving
- Premium surface finish using premium granite aggregates
- Various depth options available for different traffic loadings
- Can be laid in a variety of patterns depending on unit selected, please ask our technical team for laying pattern options
- Modern square edge finish
- Available in 5 colours and bespoke colours available upon request
- Normally supplied in a 3-size mix for increased aesthetics

Product Range

Dimensions (mm)	Colours	Pcs Per m2	m2 Per bale	Pcs Per bale	No. Layers	Approx. Bale Weight (KG)	Profile
3 size 50	Slate, Rustic, Curragh Gold, Charcoal, Natural	35	11.5	420	35	1200	Square edge
3 size 60	Slate, Rustic, Curragh Gold, Charcoal, Natural	35	9.6	350	10	1205	Square edge
3 Size 80	Slate, Rustic, Curragh Gold, Charcoal, Natural	35	6.72	245	7	1190	Square edge
240x160x60	Slate, Rustic, Curragh Gold, Charcoal, Natural	27	9.24	240	12	1140	Square edge
240x160x80	Slate, Rustic, Curragh Gold, Charcoal, Natural	27	6.93	180	9	1170	Square edge

Bold Text = in stock – Light Text = made to order (minimum order quantity applies)

Colour Chart

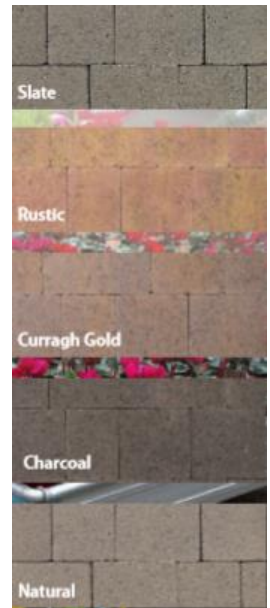

Benefits

- Extremely robust due to the increased cement content and premium aggregate surface
- Unlike Natural concrete paving and Porcelain, the Lismore Block Paving keeps the declared slip resistance throughout its life cycle
- Cost reduction on supply and installation when compared to natural concrete paving and Porcelain
- Factory sealed application now available upon request



Product Type	Concrete Block Paving
Product Standard	EN 1338:2003
Manufacturing Method	Hydraulically pressed semi dry concrete
Finish	Premium aggregate finish
Packaging Information	Baled, strapped and plastic cover
Slip/Skid Resistance	low – Typically USRV/PTV >60
Strength	Typical tensile splitting strength of >3.6 MPa and a failure load of >250N/mm

Application & Trafficking	Installation to BS 7533-2:2001. Please refer to the relevant part of BS 7533 for the correct sub-base design and the most suitable product size for your application. Available from www.bsigroup.com Product suitable for both pedestrian and commercial use
Joint	Lismore Block Paving have a 1.5mm approx. internal spacer nib which will give a resulting standard joint width of approx. 2mm when laid. Joints should be filled with kiln dried sand.
BREEAM	A rated in accordance with Green Guide Specification Edition 4, 2009. A+ rated when used in conjunction with a prepared recycled sub-base

Technical Support

Help with the preparation of specifications using any of Kilsaran's hard landscaping products, including design, BIM and NBS is available through our dedicated technical team and regional sales office.

For further information, please contact Kilsaran's **Technical Team:**
technical@kilsaran.ie

Eco Paving Range Kilsaran are committed to leading the way in the industry with sustainable and environmentally friendly product manufacturing and continual product development.

Get in touch



ROI T: +353 (0)1 802 6300 E: technicaladmin@kilsaran.ie kilsaran.ie

UK T: +44 (0)161 872 8899 E: info@kilsaraninternational.co.uk kilsaraninternational.co.uk