

## Mellifont Block Paving


### Features

- Concrete Block Paving
- Premium surface finish using premium granite aggregates
- Various depth options available for different traffic loadings
- Can be laid in a variety of patterns depending on unit selected, please ask our technical team for laying pattern options
- Antiqued edges and surface give the effect of a time worn cobble
- Available in 5 colours and bespoke colours available upon request
- Normally supplied in a 3-size mix for increased aesthetics

### Product Range

Dimensions (mm)	Colours	Pcs Per m <sup>2</sup>	m <sup>2</sup> Per bale	Pcs Per bale	No. Layers	Approx. Bale Weight (KG)	Profile
3 size 50	Slate, Rustic, Curragh Gold, Charcoal, Natural	35	11.5	420	35	1200	Antiqued
3 size 60	Slate, Rustic, Curragh Gold, Charcoal, Natural	35	9.6	350	10	1205	Antiqued
3 Size 80	Slate, Rustic, Curragh Gold, Charcoal, Natural	35	6.72	245	7	1190	Antiqued
240x160x60	Slate, Rustic, Curragh Gold, Charcoal, Natural	27	9.24	240	12	1140	Antiqued
240x160x80	Slate, Rustic, Curragh Gold, Charcoal, Natural	27	6.93	180	9	1170	Antiqued

Bold Text = in stock – Light Text = made to order (minimum order quantity applies)

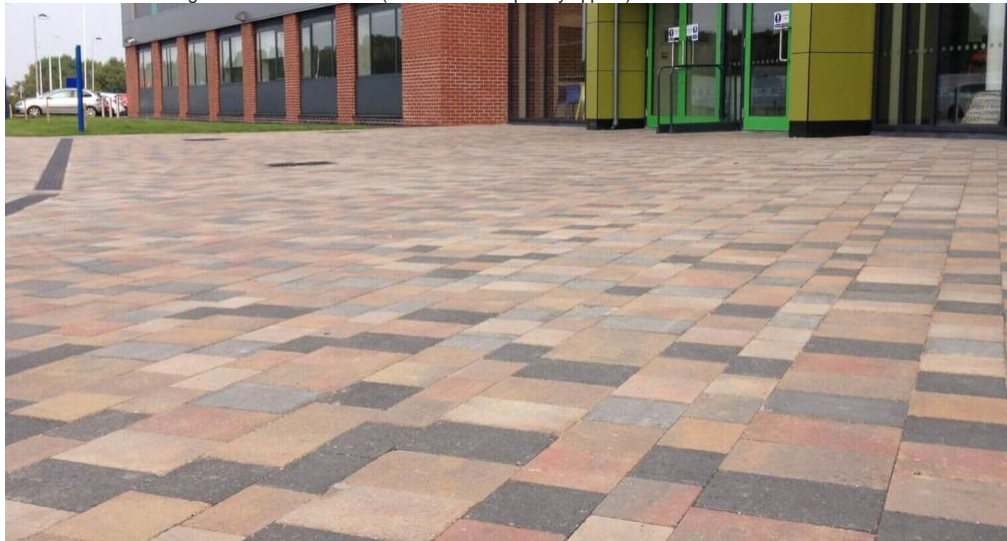

### Colour Chart



### Benefits

- Extremely robust due to the increased cement content and premium aggregate surface
- Mellifont Block Paving keeps the declared slip resistance throughout its life cycle
- Cost reduction on supply and installation when compared to natural concrete paving and Porcelain
- Factory sealed application now available upon request

<b>Product Type</b>	Concrete Block Paving
<b>Product Standard</b>	EN 1338:2003
<b>Manufacturing Method</b>	Hydraulically pressed semi dry concrete
<b>Finish</b>	Premium aggregate finish
<b>Packaging Information</b>	Baled, strapped and plastic cover
<b>Slip/Skid Resistance</b>	low – Typically USRV/PTV >60
<b>Strength</b>	Typical tensile splitting strength of >3.6 MPa and a failure load of >250N/mm

<b>Application &amp; Trafficking</b>	Installation to BS 7533-2:2001. Please refer to the relevant part of BS 7533 for the correct sub-base design and the most suitable product size for your application. Available from <a href="http://www.bsigroup.com">www.bsigroup.com</a> Product suitable for both pedestrian and commercial use
<b>Joint</b>	Mellifont Block Paving have a 1.5mm approx. internal spacer nib which will give a resulting standard joint width of approx. 2mm when laid. Joints should be filled with kiln dried sand.
<b>BREEAM</b>	A rated in accordance with Green Guide Specification Edition 4, 2009. A+ rated when used in conjunction with a prepared recycled sub-base

### Technical Support

Help with the preparation of specifications using any of Kilsaran's hard landscaping products, including design, BIM and NBS is available through our dedicated technical team and regional sales office.

For further information, please contact Kilsaran's **Technical Team:**  
[technical@kilsaran.ie](mailto:technical@kilsaran.ie)

**Eco Paving Range** Kilsaran are committed to leading the way in the industry with sustainable and environmentally friendly product manufacturing and continual product development.

## Get in touch



**ROI** T: +353 (0)1 802 6300 E: [technicaladmin@kilsaran.ie](mailto:technicaladmin@kilsaran.ie) [kilsaran.ie](http://kilsaran.ie)

**UK** T: +44 (0)161 872 8899 E: [info@kilsaraninternational.co.uk](mailto:info@kilsaraninternational.co.uk) [kilsaraninternational.co.uk](http://kilsaraninternational.co.uk)