


FACING QUALITY BLOCK

FEATURES & BENEFITS

- Quality assured manufacture
- Produced nationwide
- Long term durability
- Sustainable production process
- Available in solid and hollow format for ultimate versatility
- Ideally suited for use in commercial and leisure developments
- Provides an even surface for paint or other finishes
- Full range of accessories
- Cost effective
- Designed to meet the current building regulations and relevant national standards
- Product technical advice available

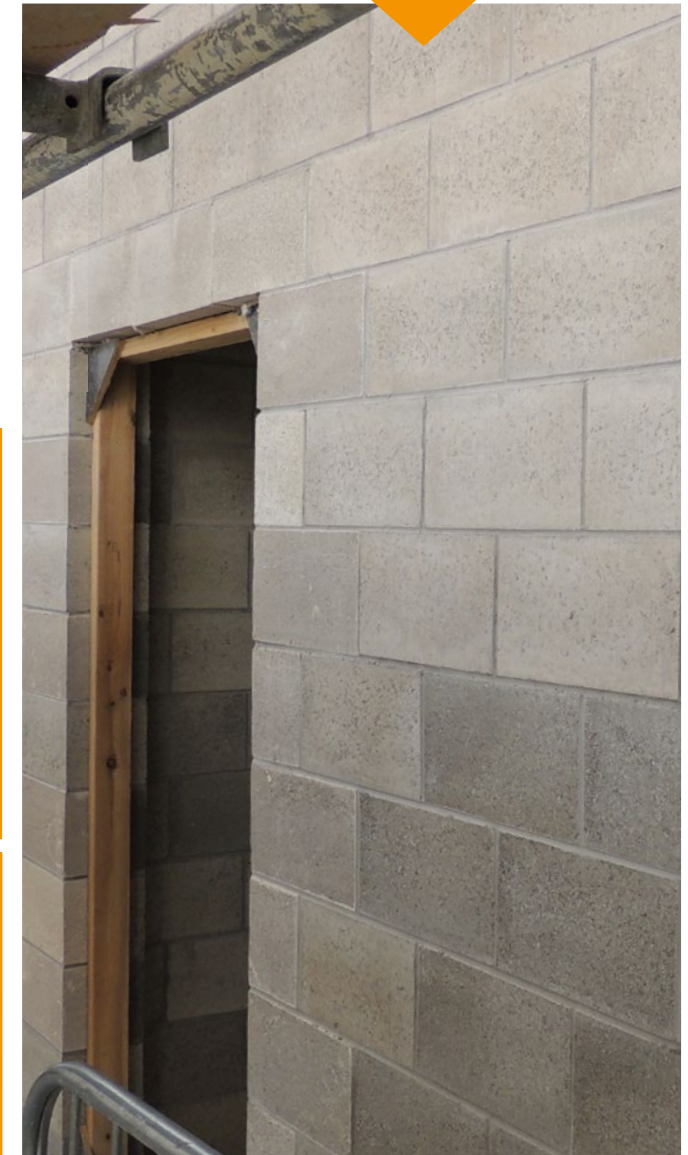

Size (mm)	440x215 (Solid)	440x100 (Solid / Soap Bar)	440x140 (Solid / Soap Bar)	440x215 (Hollow & U Block)	215x215 (Hollow & U Block)	440x215 L Block	215x100 Stock Brick
Thickness (mm)	65 10	100	100	215	215	100 (175)	65
Density	>1950kg/m ³	>1950kg/m ³	>1950kg/m ³	>1950kg/m ³	>1950kg/m ³	>1950kg/m ³	>1950kg/m ³
Strength (N/mm²)	7.5, 15	7.5, 15	7.5, 15	7.5, 10	7.5, 10	7.5, 15	7.5, 15
Finish	Paint Grade	Paint Grade	Paint Grade	Paint Grade	Paint Grade	Paint Grade	Paint Grade
Thermal	0.90 - 1.00W/mK (λ10, Dry Mat)	0.90 - 1.00W/mK (λ10, Dry Mat)	0.90 - 1.00W/mK (λ10, Dry Mat)	0.90 - 1.00W/mK (λ10, Dry Mat)	0.90 - 1.00W/mK (λ10, Dry Mat)	0.90 - 1.00W/mK (λ10, Dry Mat)	0.90 - 1.00W/mK (λ10, Dry Mat)

Disclaimer

Whilst every care has been taken in compiling this technical information guide, the information above is Kilsaran's interpretation of the current building regulations and associated requirements for masonry construction. This document serves merely as a guide to the user. Kilsaran accepts no responsibility whatsoever for any errors made through the use or interpretation of the information contained within this document. It is the responsibility of the client to ensure that all design work and calculations are carried out by an appropriately qualified professional in accordance with all current National and European standards.