

> Killeen Flag

Technical Data Sheet

Contemporary Flag Paving



Part of the
Eco Paving Range

nssPlus

Q25 315

Q25 31


Features

- Concrete Flag Paving
- Irregular edge profile
- Suitable for use on patios, paths, domestic driveways and commercial pedestrian areas
- Can be laid in a random bond pattern
- Available in 3 standard colours, with the option to choose from our bespoke colour range as a special made to order. Terms and Conditions apply.
- Supplied as a mixed pack of 4 sizes as shown
- Supplied in 70mm depth
- Available in 3 types of finishes - Antiqued, Ground and Standard Smooth
- Available in permeable option

Product Range

Range	Dimensions (mm)	Colours	Pcs per m2	m2 per bale	Pcs per Bale	No. Layers	Approx. Bale Weight (KG)	Profile
Killeen (Standard Smooth)	4 Co-Ordinating Mixed Sizes as shown.	Silver Granite, Black Granite, Slate	N/A	7.56	72	9	1180	Irregular edge
Killeen (Antiqued)		Silver Granite, Black Granite, Slate	N/A	7.56	72	9	1180	Irregular edge
Killeen (Ground)		Silver Granite, Black Granite	N/A	7.56	72	9	1180	Irregular edge

Bold Text = in stock - Light Text = made to order (minimum order quantity applies)

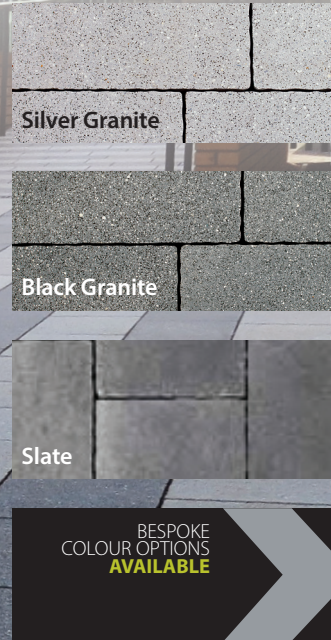

340 x 260mm	410 x 260mm	340 x 260mm	410 x 260mm
460 x 260mm	390 x 260mm	460 x 260mm	390 x 260mm

Unit sizes and quantities per layer, as supplied.

> Get In Touch:

T: +353 1 802 6300 technical@kilsaran.ie www.kilsaran.ie

T: +44 (0) 161 872 8899 www.kilsaraninternational.co.uk



Technical & Performance Data

Product Type	Concrete Flag
Product Standard	BS EN 1339:2003
Manufacturing Method	Hydraulically pressed semi-dry concrete
Finish	Antiqued, Standard Smooth and Ground finish
Packaging Information	Baled, strapped and plastic cover
Slip/skid Resistance	Medium to Low potential - Typically USRV 60 for antiqued and standard smooth, typically USRV 52 for ground finish
Strength	Typically class 1 compliant to BS EN 1339:2003

Application & Trafficking	Product suitable for pedestrian areas, domestic driveways and commercial footpaths, light vehicular over-run can be accommodated when used in conjunction with the correct site specific sub-base design.
Joint	Killeen Flags has a 4-6mm approx. integral spacer nib which will give a resulting standard joint width of approx. 6-8mm when laid. Joint should be filled with Kiln dried sand or proprietary wide jointing compound approved for this product. Note that silver granite Kiln dried sand must be used for the silver colour option to reduce potential staining
BREEAM	A rated in accordance with the Green Guide Specification Edition 4, 2009. A+ rated when used in conjunction with a prepared recycled sub-base

Eco Paving Range

Kilsaran is committed to leading the way in the industry with sustainable and environmentally friendly product manufacturing and continual product development.

All of our products are manufactured in our industry leading best in class manufacturing facilities to reduce the impact of our product range on our environment. All products are manufactured using 100% recycled water and using locally sourced quality materials.

Within our Eco Paving range we have developed and engineered a number of products with further reduced impact on the environment. The Eco Paving range is manufactured with a minimum of 25% non-primary aggregates, up to 10% pre consumer aggregate replacement and 50% of the ordinary Portland cement replaced with a carbon neutral high quality cement replacement.

Maintenance and Cleaning

Kilsaran recommends regularly cleaning on an annual basis is performed, for more information please contact our technical team or download our Maintenance and Cleaning document from our website.



TECHNICAL SUPPORT

Help with the preparation of specifications using any of Kilsaran's hard landscaping products, including design, BIM and NBS is available through our dedicated technical team and regional sales office.

For further information, please contact Kilsaran's Technical Team: technical@kilsaran.ie

KILSARAN INTERNATIONAL
Piercetown
Dunboyne
Co. Meath
Ireland
A86 W820

T: 01 802 6300
E: info@kilsaran.ie
kilsaran.ie

KILSARAN INTERNATIONAL
Suite 30
1-3 The Courtyard
Calvin Street
Bolton
BL1 8PB
T: 0161 872 8899
E: info@kilsaraninternational.co.uk
kilsaraninternational.co.uk

