

Clima-Pave Lismore


Features

- Clean, sharp edges
- No chamfer: Ideal for areas where trolleys are used
- 3 Size mix
- Available in a range of colours
- Produced in through-mix

Product Range

Range	Dimensions (mm)	Colours	Pcs Per m2	m2 Per bale	Pcs Per bale	No. Layers	Approx. Bale Weight (KG)	Profile
Clima - Lismore (Standard)	(3 size mix only) 120 x 160 x 60 160 x 160 x 60 240 x 160 x 60	Natural, Charcoal, Rustic, Curragh Gold, Brindle, Red	35	9.6	350	10	1205	Square Edge
Clima - Lismore (Standard)	(3 size mix only) 120 x 160 x 80 160 x 160 x 80 240 x 160 x 80	Natural, Charcoal, Rustic, Curragh Gold, Brindle, Red	35	6.72	245	7	1190	Square Edge
Clima - Lismore (Standard)	240 x 160 x 80	Natural, Charcoal, Rustic, Curragh Gold, Brindle, Red	27	6.93	180	9	1170	Square Edge

Bold Text = in stock – Light Text = made to order (minimum order quantity applies)

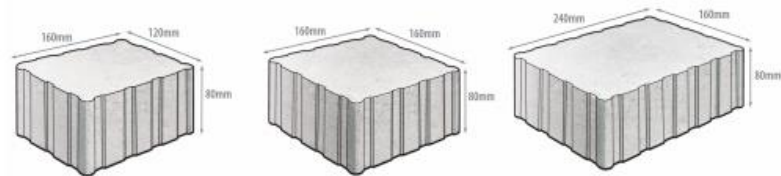

Product Type	Concrete Paver
Product Standard	BS EN 1338:2003
Manufacturing Method	Hydraulically pressed semi dry concrete
Finish	Standard, squared edged
Packaging Information	Baled, strapped and plastic cover
Slip/Skid Resistance	Low potential - Typical USRV 60
Strength	Typical Tensile Splitting Strength of ≥ 3.6 MPa and a failure load of ≥ 250 N/mm

Application & Trafficking	Installation to BS 7533-2:2001. Please refer to the relevant part of BS 7533 for the correct sub-base design and the most suitable product size for your application. Available from www.bsigroup.com Product suitable for both pedestrian and commercial use
Jointing	Aggregates, cement, admixture, and colour pigment
Permeability	1800 litres/second/hectare

Technical Support

Help with the preparation of specifications using any of Kilsaran's hard landscaping products, including design, BIM and NBS is available through our dedicated technical team and regional sales office.

For further information, please contact Kilsaran's **Technical Team:** technical@kilsaran.ie

Eco Paving Range Kilsaran are committed to leading the way in the industry with sustainable and environmentally friendly product manufacturing and continual product development.

Get in touch



ROI T: +353 (0)1 802 6300 E: technicaladmin@kilsaran.ie kilsaran.ie

UK T: +44 (0)161 872 8899 E: info@kilsaraninternational.co.uk kilsaraninternational.co.uk