

Clima-Pave Newgrange


Features

- Textured granite-effect finish
- 3 size mix
- Available in a range of colours
- Part of the eco paving range

Product Range

Range	Dimensions (mm)	Colours	Pcs Per m2	m2 Per bale	Pcs Per bale	No. Layers	Approx. Bale Weight (KG)	Profile
Clima – Newgrange 60mm (Shotblast)	200 x 100 x 60	Silver Granite, Black Granite, Buff Granite	50	9.6	480	10	1060	Chamfer
Clima – Newgrange 60mm (Shotblast)	(3 size mix only) 120 x 160 x 60 160 x 160 x 60 240 x 160 x 60	Silver Granite, Black Granite, Buff Granite	35	9.6	350	10	1205	Square Edge
Clima – Newgrange 80mm (Shotblast)	3 size mix only) 120 x 160 x 80 160 x 160 x 80 240 x 160 x 80	Silver Granite, Black Granite, Buff Granite	35	6.72	245	7	1190	Square Edge
Clima – Newgrange 80mm (Shotblast)	240 x 160 x 80	Silver Granite, Black Granite, Buff Granite	27	6.72	175	7	1075	Square Edge
Clima – Newgrange 80mm (Shotblast)	200 x 100 x 80	Silver Granite, Black Granite, Buff Granite	50	6.72	336	7	1115	Chamfer

Bold Text = in stock – Light Text = made to order (minimum order quantity applies)

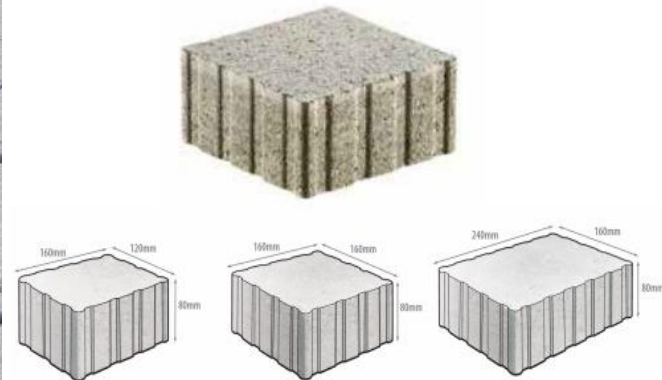

Product Type	Concrete Paver
Product Standard	BS EN 1338:2003
Manufacturing Method	Hydraulically pressed semi dry concrete
Finish	Textured
Packaging Information	Baled, strapped and plastic cover
Slip/Skid Resistance	Low potential - Typical USRV 60
Strength	Typical Tensile Splitting Strength of ≥ 3.6 MPa and a failure load of ≥ 250 N/mm

Application & Trafficking	Domestic, Civic and Commercial
Constituents	Aggregates, cement, admixture and colour pigment
Permeability	1800 litres/second/hectare

Technical Support

Help with the preparation of specifications using any of Kilsaran's hard landscaping products, including design, BIM and NBS is available through our dedicated technical team and regional sales office.

For further information, please contact Kilsaran's **Technical Team:**
technical@kilsaran.ie

Eco Paving Range Kilsaran are committed to leading the way in the industry with sustainable and environmentally friendly product manufacturing and continual product development.

Get in touch



ROI T: +353 (0)1 802 6300 E: technicaladmin@kilsaran.ie kilsaran.ie

UK T: +44 (0)161 872 8899 E: info@kilsaraninternational.co.uk kilsaraninternational.co.uk