

Cycleway Tactile Paving



BENEFITS

- Tactile Flags are easily replaceable, allowing the removal of trip hazards.
- Universal & easily recognisable
- Hard-wearing surface
- Vibrant, long-lasting colours


COLOUR CHART



Buff

FEATURES

- Concrete flag Paving
- Cycleway Tactile paving is used to indicate the beginning and end of shared pedestrian and cycleway paths which are not differentiated by two levels
- Normally cycleway tactile paving is laid transverse to indicate the pedestrian surface and longitudinally to indicate the cycling surface at the start and end of shared path routes
- Available in a 50mm depth for pedestrian traffic

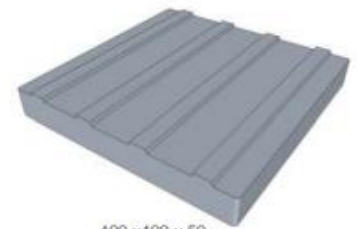

400 x 400 x 50
Cycleway Tactile Paving Unit Profile

PRODUCT RANGE

Dimensions mm	Colours	Pcs per m2	M2 per bale	Pcs per bale	No. Layers	Approx bale weight kg	Profile
400x400x50	Buff	6.3	11.52	72	12	1240	Cycleway

Product Type	Concrete Flag Paving	Application & Trafficking	Product suitable for both pedestrian & vehicular traffic when designed and installed in conjunction with the correct, site specific sub-base design as per the relevant BS7533 standard.
Product Standard	BS EN 1339:2003, BS7997 BS:2003, DDCEN-TS15209:2008	Joint	Cycleway Tactile Paving has a narrow-finished joint of 1mm approx. This product has no integral spacer nib and no chamfer. Great care and attention must be paid when handling and installing to avoid chipping and damage to edges. Joints should be filled with Kiln dried jointing sand or if laid on a motor bedding then a mortar joint should be used.
Manufacturing Method	Hydraulically pressed semi dry concrete	BREEAM	A rated in accordance with Green Guide Specification Edition 4, 2009. A+ rated when used in conjunction with a prepared recycled sub-base
Finish	Cycleway Pattern. Available in alternative textures and colours upon request.		
Packaging Information	Baled, strapped and plastic cover		
Slip/Skid (Potential for Slip)	Low - USRV/PTV 40-74, as per EN 1339:2003 Table NA.4. Test values typically >60		
Strength	Compliant to BS EN 1339:2003		

TECHNICAL SUPPORT

Help with the preparation of specifications using any of Kilsaran's hard landscaping products is available through our dedicated Technical & Sales team. Please contact Kilsaran's Technical Team:

technical@kilsaran.ie

ECO PAVING RANGE

Kilsaran are committed to leading the way in the industry with sustainable and environmentally friendly product manufacturing and continual product development.

Get in touch



ROI T: +353 (0)1 802 6300 E: technical@kilsaran.ie | kilsaran.ie

UK T: +44 (0)161 872 8899 E: info@kilsaraninternational.co.uk | kilsaraninternational.co.uk

Kilsaran
ideas taking shape